



MMC-TC Modular Pulse/Dir Controller



MODULAR CONTROLLERS

Stand Alone Single Axis
Press Together Multi-Axis
Mix & Match Axis Types
Expansion I/O Modules
Auto Detect Connected Modules
Auto Configure for Replacement
Customization Available



FLEXIBLE HARDWARE

Removable Connectors
Configurable Digital/Analog I/O
Multiple Encoder Types
High Speed Capture
Integrated Amplifier Options
Din-Rail Ready

The MMC-TC is a Single Axis Modular Pulse/Direction (Quadrature) Controller for Controlling Axes with External Stepper Amplifiers or Digital Servo Amplifiers.

Modular Controllers give users the power of a Multi-Axis Motion Controller with the flexibility to add Axes in a Modular Fashion. A single Axis Controller instantly becomes a multi-axis controller when snapped onto another controller. Due to the nature of the connection, no change of control or programming architecture is needed; the software simply recognizes that it has more available axes and I/O to utilize.


Inspired by MIT Media Labs "Scratch" software that was developed to teach the fundamentals and structure of programming.

POWERFUL SOFTWARE

Inspired by MIT's "Scratch"
Simple Drag, Drop, & Edit
Create & Save Custom Blocks
Up to 16 Concurrent Threads
Parameter Test & I/O Viewer
Integrated HMI Console Builder
Customizable Test Scopes

KEY FEATURES:

- Differential Pulse / Dir (Quadrature) Controller
- 12-48Vdc Input
- (4) Dedicated Inputs (24V)
- (2) Programmable Digital I/O
- (1) 16-bit Analog Input
- (1) 16-bit Analog Output
- Flexible Encoder Inputs (Single, Quad, Serial, etc.)
- Separate Logic Power Input
- Pluggable for Multi-Axis Configuration
- USB, Ethernet, and Serial Communication

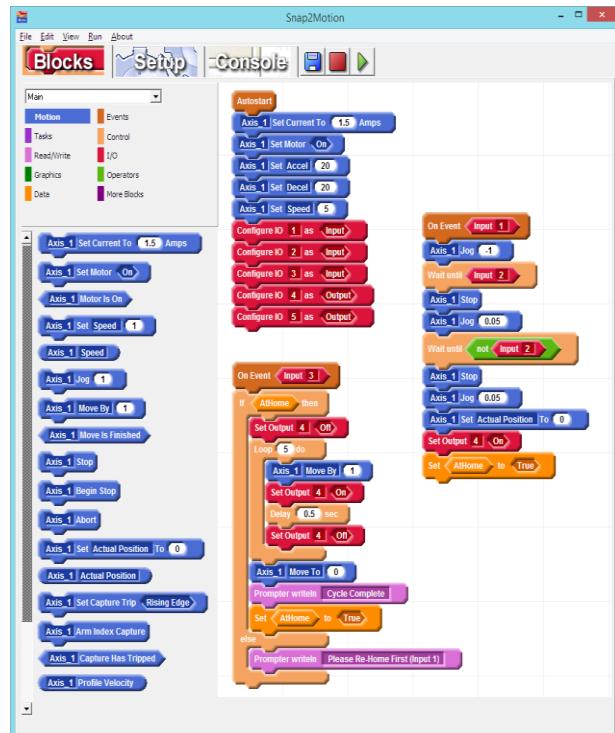

Learn More at: www.ModuSystems.com

Specifications

Controller Power

Description	Value	Units
Logic Input Voltage Range	12-48	volts DC
Logic Input Power, no outputs active, no 5V load, single module	3	watts
5V Out	750	milliamps

Motion System

Property	Value
Microcontroller	Arm Cortex
Sample Rates	Configurable from 1 kHz to 8 kHz
Native Motion Capabilities	Concurrent Motion Coordinated Vector Motion
Application Motion Capabilities	Electronic Gearing Electronic Camming Encoder-Replaces-Time PVT Kinematics Conveyor Tracking Arbitrary Closed Form Equations
Position Range	32-bit
Maximum Encoder Count Rate post quadrature	2 MHz
Maximum Step Rate	2 MHz
Hardware Position Capture	Accurate to an individual count

Communication Ports




Description	Type	Connector
Programming Port	USB	USB Standard B
General Purpose Serial	RS232 or RS485 Run-time configurable	3 pin 3.81 mm Euro Screw terminal
General Purpose Ethernet	TCP/IP server supporting 8 concurrent ports	Single RJ-45

IO and Mechanical

Inputs and Outputs

Resource	Number	Voltage	Description
Configurable Digital IO	2	5--48	2 amps sourcing output current optoisolated input is sourcing or sinking as group
Dedicated Digital Input	4	5-48	Optoisolated sourcing or sinking as a group
Analog Input	1	0-20	0-20 volt measurement range. Clamps permit voltage up to 48 volts on pin. 16-bit resolution
Analog Output	1	0-5	12-bit resolution
Encoder Inputs RS422 Differential Receivers	3	5-24	A, B, and Index channels can be used for encoder input or general purpose inputs

Mechanical

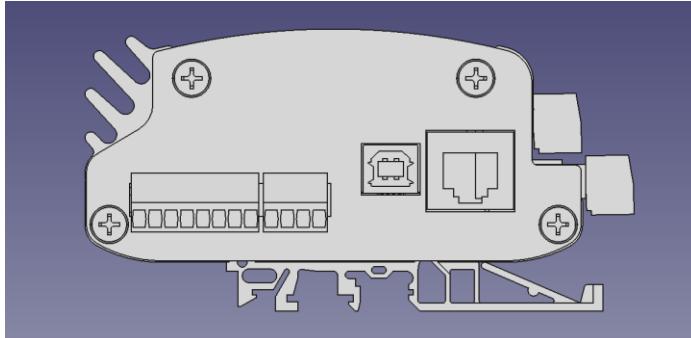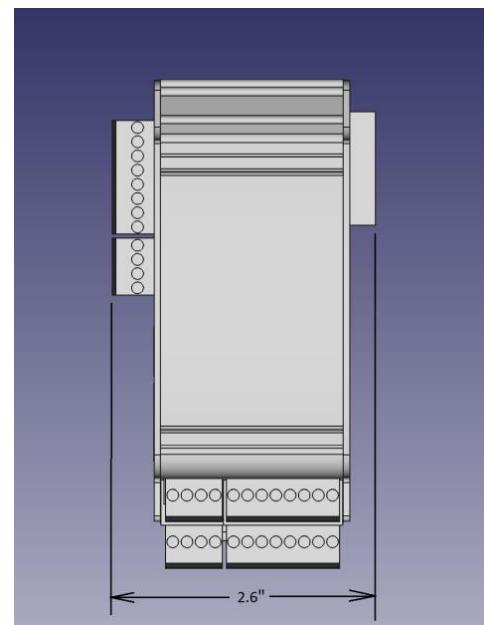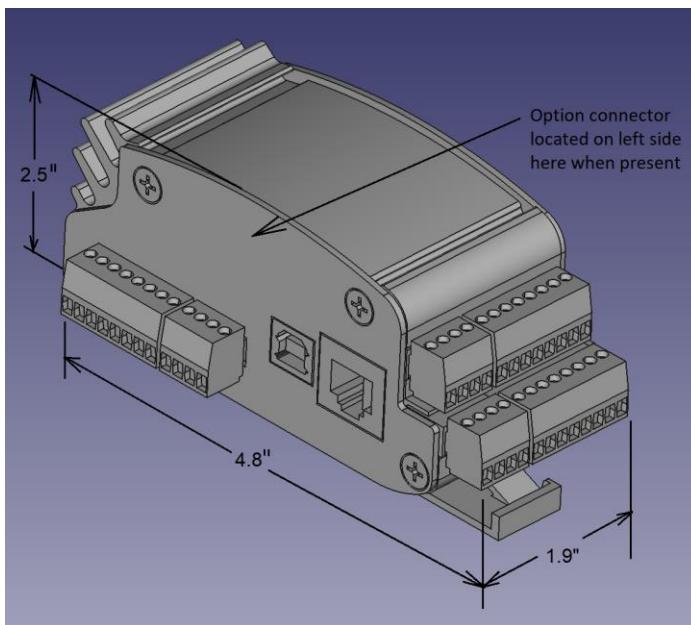

Clearance required for right side connector. Ensure clearance is provided for airflow around heat sink fins when operating at higher current levels. Avoid mounting controller inverted as this traps air in the heat sink fins. Insure clearance on left side for wiring, USB, and Ethernet connectors.

Side Connectors

EStop Connector - Left Side 8 Position

The first three positions of the EStop connector are for application use. The remaining positions are used for communication to snapped-together modules. No connections should be made to the remaining 5 positions.

Signal	Description
Gnd	Provides Gnd to snapped-together modules. May be used as a general purpose Gnd connection position
Logic Pwr	Provides Logic Power to snapped-together modules. May be used as a general purpose Logic Power position and is often jumpered to the adjacent EStop position to satisfy EStop
EStop	This hardware EStop input must be satisfied to permit motion. The signal is satisfied by being connected to 5-48 volts. This connection usually incorporates normally closed EStop buttons so that the opening of a button, or breakage of a wire, performs a shutdown

Serial Connector - Left Side 3 Position

The serial connector can support RS232 or RS485 based on software configuration. When using RS485 a termination resistor is recommended to ensure failsafe signal management features operate properly. For noisy environments an external failsafe bias circuit is recommended.

Signal	Description
Gnd	Common to all Gnd positions on controller this is used to provide a common Gnd to the serial device
Rx/+	RS232 receive signal should be connected to transmitter of serial device. When configured for RS485 this is the Data+ signal
Tx/-	RS232 transmit signal should be connected to receiver of serial device. When configured for RS485 this is the Data- signal.

P

Intermodule Plug Connector – Right Side 8 Position

The plug style connector on the right side of the controller is only used to provide power and communication to snapped-together modules. No connections should be made to this plug connector.

Front Connectors

Power Connector – Front Side Top 4 Position

Signal	Description
Gnd	Used for power supply return connection
Logic Pwr	Used for power supply "+" connection. It is recommended that Logic Power not be interrupted by safety disconnects so as to sustain program operation and communications with host
Enable	Used to Enable External Amplifier
In Common	Input Common is used to configure inputs as sourcing or sinking. If signals provide voltage, then connect In Common to Gnd. If signals act like switches to Gnd then connect In Common to Logic Pwr

Encoder Connector – Front Side Top 8 Position

Signal	Description
Gnd	Used to power encoder
5V Out	Used to power encoder. If external drive is providing signals this signal might not be required
Enc A+	Encoder A+ channel if differential or A channel if single ended
Enc A-	Encoder A- channel if differential or disconnected if encoder is single ended. Internally pulled to 2V. Do not connect to Gnd
Enc B+	Encoder B+ channel if differential or B channel if single ended
Enc B-	Encoder B- channel if differential or disconnected if encoder is single ended. Internally pulled to 2V. Do not connect to Gnd
Enc I+	Encoder Index+ channel if differential or Index channel if single ended
Enc I-	Encoder Index- channel if differential or disconnected if encoder is single ended. Internally pulled to 2V. Do not connect to Gnd

Motor Power Connector – Front Side Bottom 4 Position

Signal	Description
Step +	Differential Step Output
Step -	Differential Step Output
Dir +	Differential Direction Output
Dir -	Differential Direction Output

Front IO Connector and Indicators

IO Connector – Front Side Bottom 8 Position

If an input is needed and a dedicated input is available, it is best to use the dedicated input and preserve the more versatile DIO positions for outputs or spares

Signal	Description
DIO 1	Digital Input Output 1 can be configured as an input or an output
DIO 2	Digital Input Output 2 can be configured as an input or an output
DIN 3	Digital Input 3 is a dedicated input
DIN 4	Digital Input 4 is a dedicated input
DIN 5	Digital Input 5 is a dedicated input
DIN 6	Digital Input 6 is a dedicated input
AIN	Analog Input
AOUT	Analog Output

LED Indicators


LED	Description
Green Heartbeat	During normal operation this LED should blink at a rate between 1 Hz and several Hz reflecting the controller sample rate. A hesitation or disruption of the steady heartbeat pattern reflects a possible hardware or software issue. The first diagnostic question support will ask is “Is the Heartbeat LED blinking?”.
Yellow Application	This indicator is under application program control and has no intrinsic meaning. The Intermodule Slave program, loaded onto controllers that snap onto a left-most master controller, rapidly blink the Yellow Application LED several times during program startup when the controller is isolated. This pattern indicates that the controller is prepared to snap onto another module.
Ethernet Green Link Active	The link active light indicates that there is traffic on the Ethernet cable and that both ends are connected. If there are any issues with Ethernet first confirm that the link is active.
Ethernet Yellow 10/100	This indicator shows the connection speed

3ENC Option

Description

The 3ENC Option board provides support for three encoders, each with RS422 differential inputs for A, B, and Index signals from a 3-channel encoder. These additional encoders can be used for purposes such as master position references, dual loop, and hand wheel inputs. The 25 pin DSub connector is presented on the left side of the controller above the USB connector. Power for the encoders on this option board are part of the controller's +5V current budget.

Pin Assignments

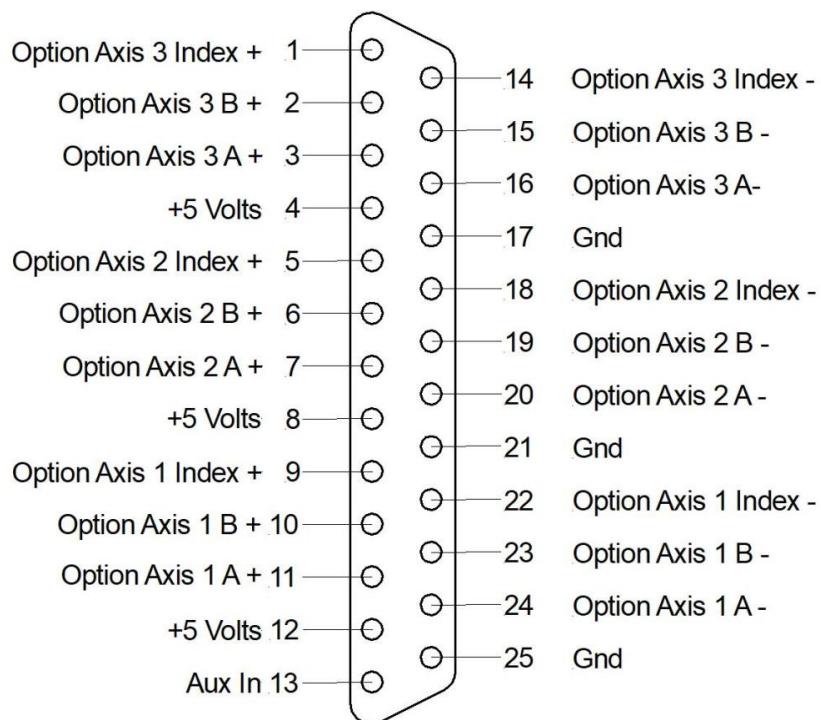

Option Specifications

Description	Value	Units
Input Signal Voltage Range	5-24	volts DC


3PD Option

Description

The 3PD Option board provides support for additional motion axes expressed as signals for use with external drives. These signals can be configured as Pulse/Direction signals or as driven quadrature signals for use with external stepper motor drivers or servo motor drivers that can accept external pulse/direction or external quadrature signals that the drive follows. Motion signals are RS422 differential outputs. If available, the quadrature format is desirable as it is more noise immune than pulse/dir however with good wiring practice either format is reliable. An input for each axis is provided and is most often used for homing. This input is the "+" side of a differential receiver where the "-" side is tied to a 2-volt internal reference.

When working with Teknic drives it is best to connect the "+" side of the Teknic signal to the +5V pin on the option connector and the "-" side of the Teknic signal to the Step- or Dir- signal on the option connector. Differential drivers do not meet the voltage requirements for Teknic inputs, but the described configuration does.

Pin Assignments

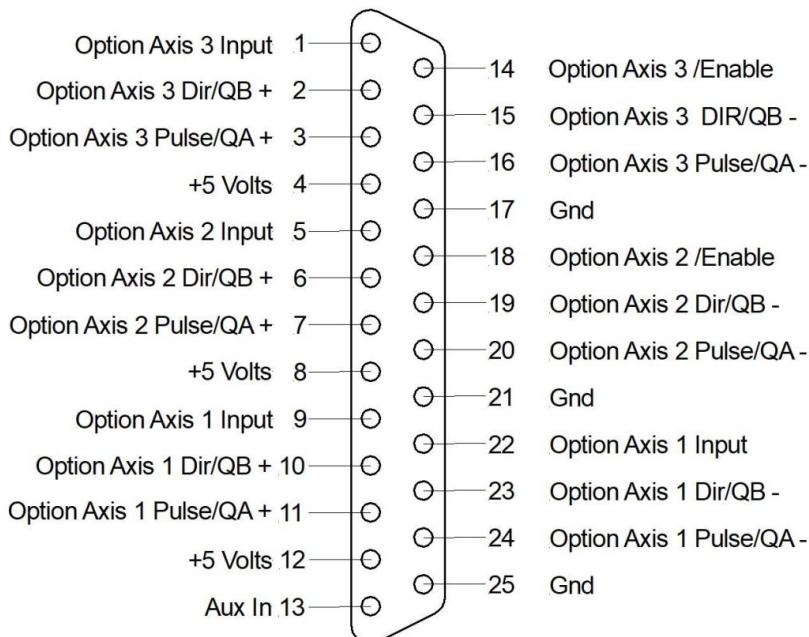

Option Specifications

Description	Value	Units
/Enable Max Voltage	35	volts DC
/Enable Max Current	30	milliamps
Input (+ side of RS422 receiver)	5-24	volts DC